


thepark

AND FACILITIES
C A T A L O G

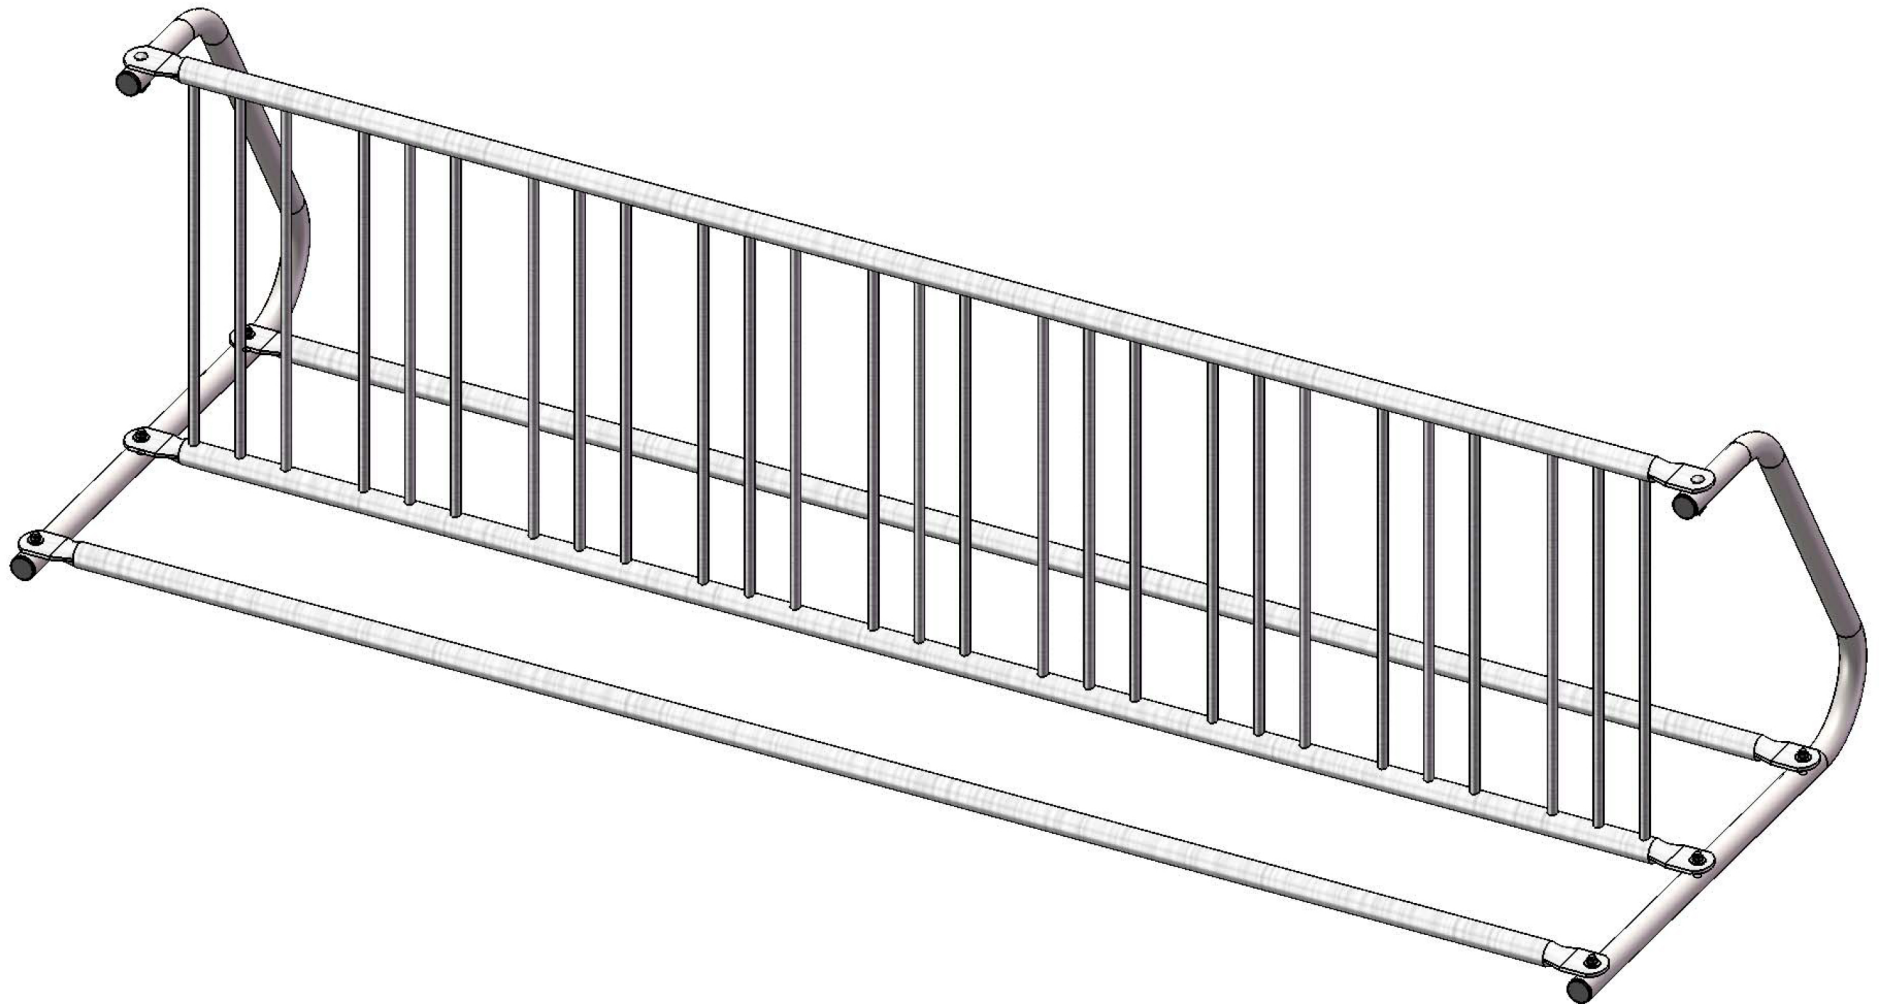

18-Bike Double-Sided Grid Bike Rack

Item #: 398-6036


SAFETY WARNINGS & EQUIPMENT INSPECTION

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Replace all worn S-hooks. S-hooks must be completely closed. Failure to close S-hooks can result in serious injury to the user. NEVER reuse S-hooks.
- Test for free movement of swing hanger and other moving attached parts.
- Check for worn chains and replace them.
- A soft resilient surface should be placed under all swings extending at least twice the height of the top rail both front and back.


HARDWARE



3/8" x 2-1/2"
Carriage Bolt




3/8" Washer



3/8" Kep Nut


TOOLS REQUIRED

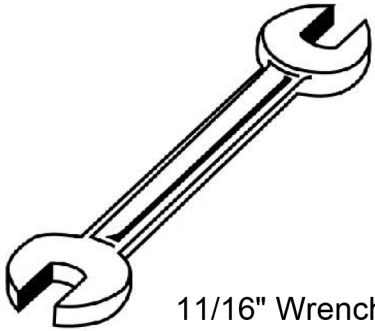


11/16" Wrench



11/16" Socket Wrench




Tape Measure

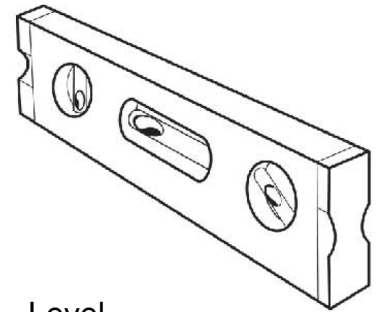

Level


TOOLS REQUIRED

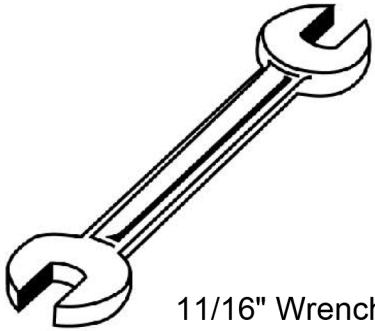


11/16" Wrench



11/16" Socket Wrench




Tape Measure

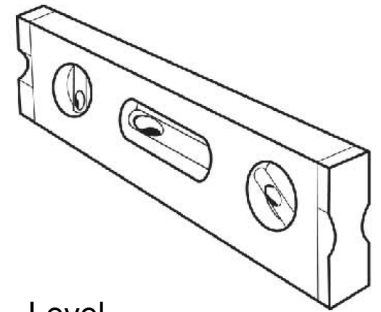



Level

COMPONENTS

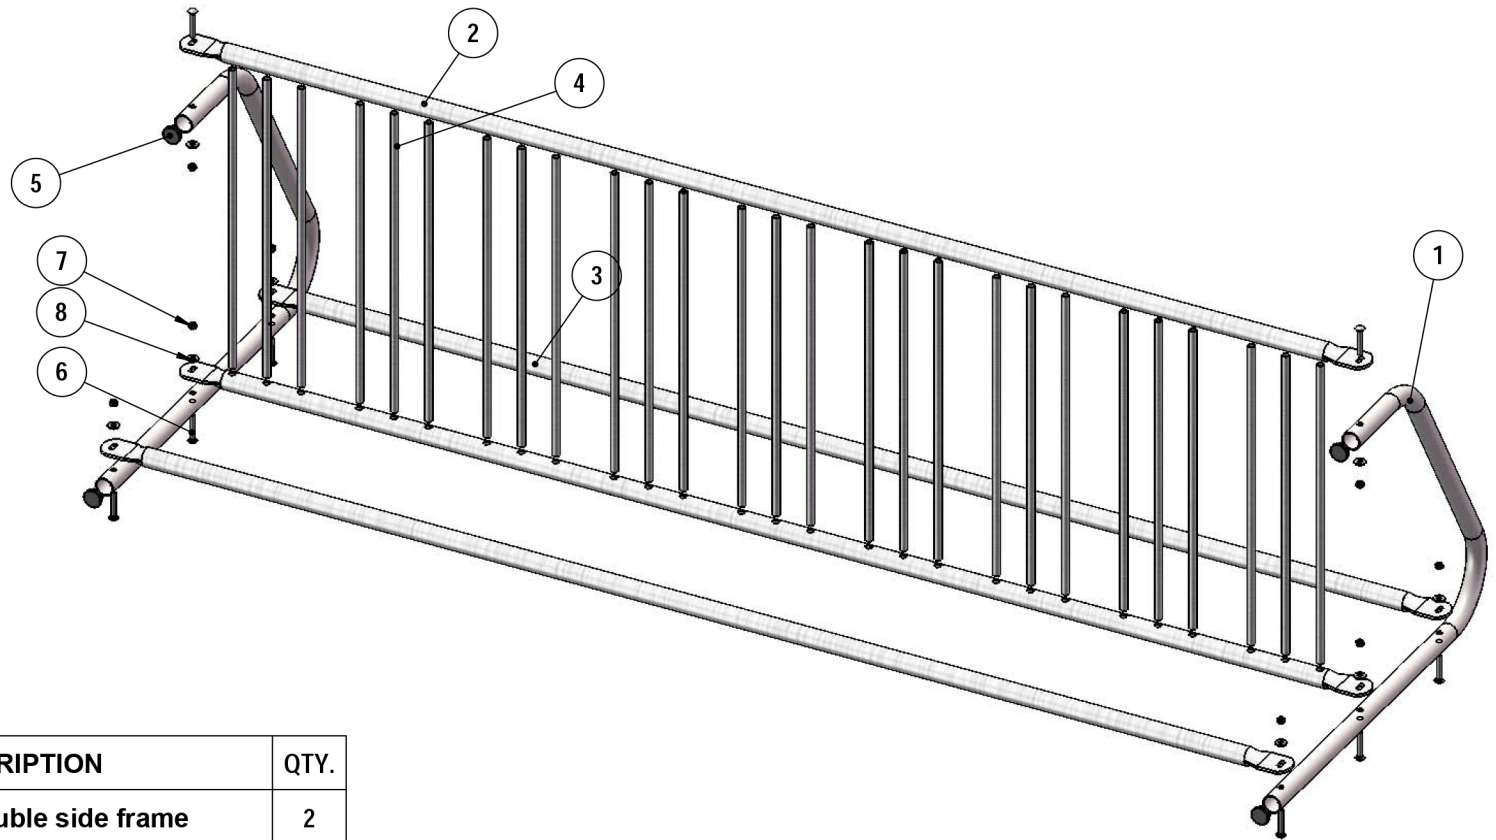


ITEM NO.	PartNo	DESCRIPTION	QTY.
1	01-02-0124	Grid rack double side frame	2
2	01-02-0132	9' grid rack support bar-DS	2
3	01-02-0128	9' grid rack side bar	2
4	01-02-0001	Standard Rung Bar	27
5	33-08-0004	1-5/8" 14-18 ga. round ribbed insert	4
6	33-06-0013	3/8" x 2 1-2" Carriage Bolt (Zinc)	8
7	33-03-0013	3/8" Kep Nut (SS)	8
8	33-02-0002	3/8" Zinc Plated Washer	8

STEP 1

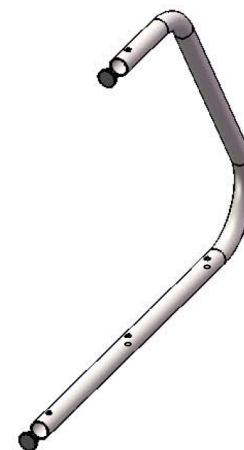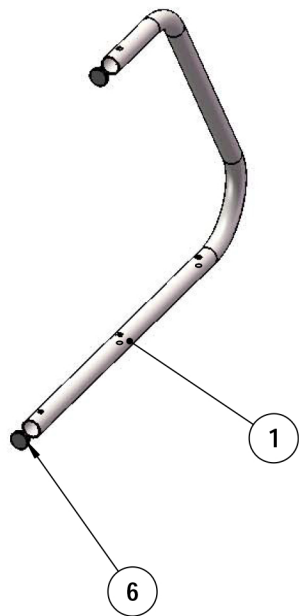


Attach the Cap Inserts to the Grid Rack Frame as shown.

STEP 2

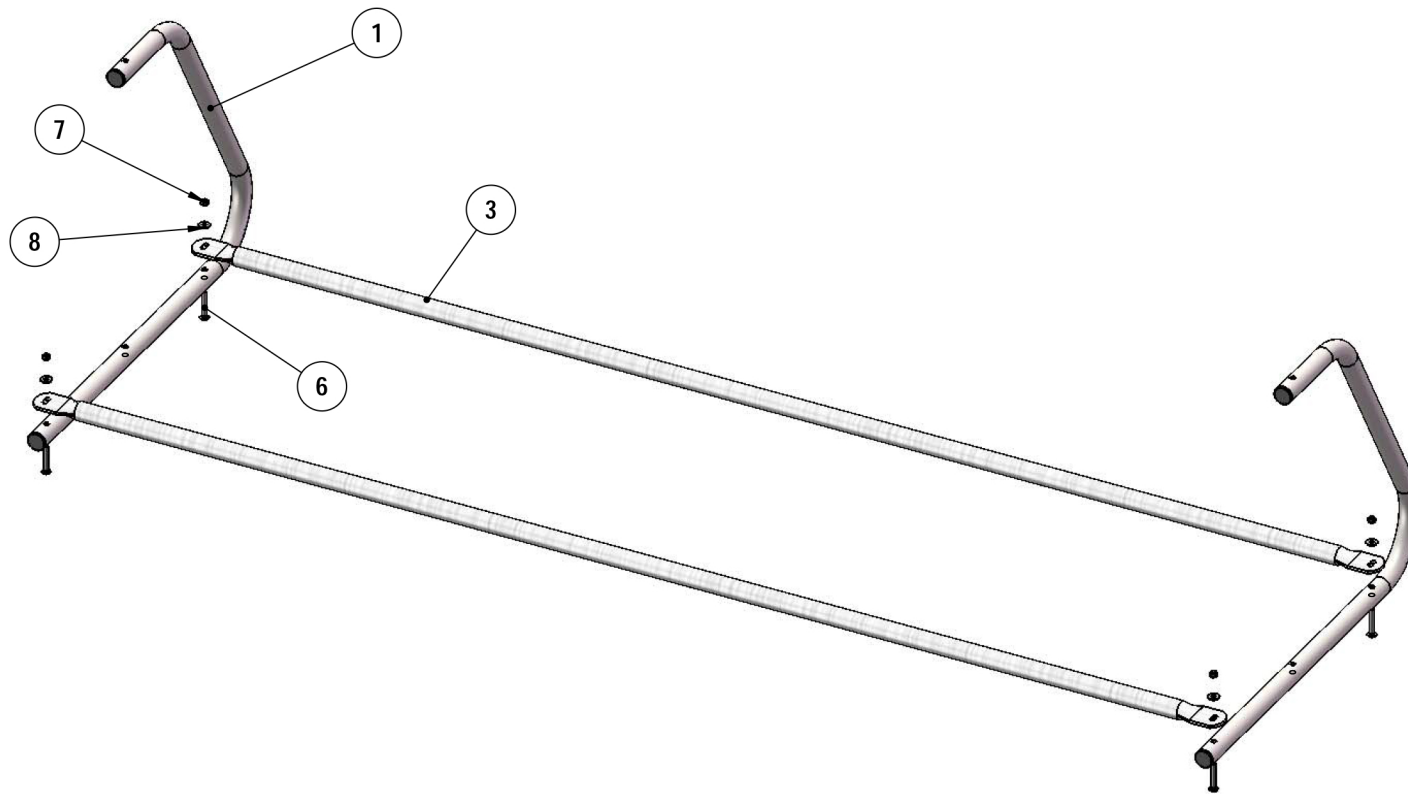

Attach the Grid Rack Side Bar to the Grid Rack Frame using specified hardware.

STEP 3

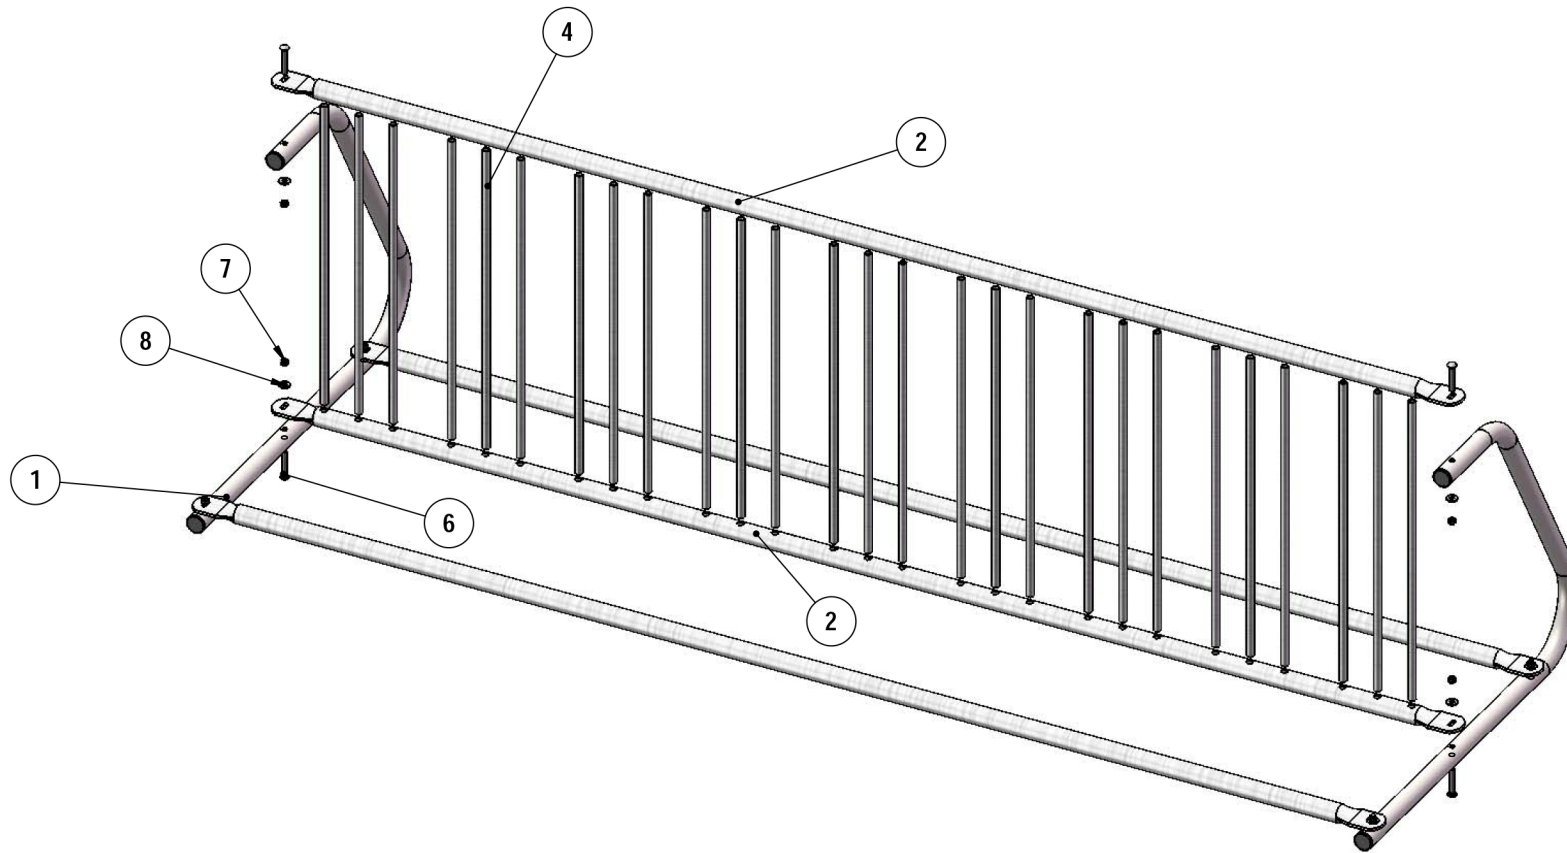

Attach the upper Grid Rack Support Bar to the Grid Rack Frame using specified hardware. Then insert Standard rung bars into holes. Next attach the upper Grid Rack Support Bar to the Grid Rack Frame using specified hardware.

OVERALL DIMENSIONS

