




2 ELEVATION VIEW



1 TOP VIEW

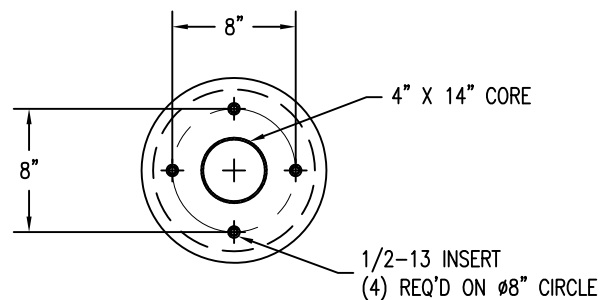

3 BOTTOM VIEW

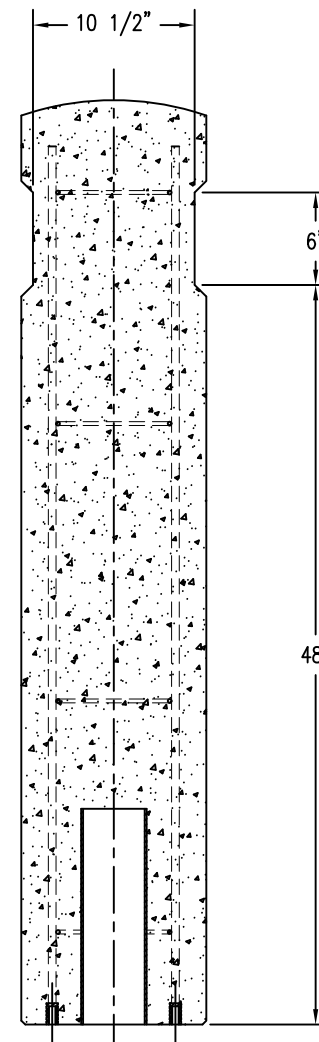

4 CROSS SECTION

REVISIONS			
1	NAME	DATE	NOTES
2			
3			
4			
5			
6			
7			
8			

3350 NW Boca  
Raton Blvd., Boca  
Raton, FL 33431


JOB NAME  
ADDRESS  
CITY, STATE ZIP

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
FRACTIONS ±1/8"


DRAWN BY: SK  
DATE: 6/18/15  
CO NUMBER: ?  
WEIGHT: 600 LBS

PRODUCT NO.  
TF 6087


## ANCHOR STYLE C

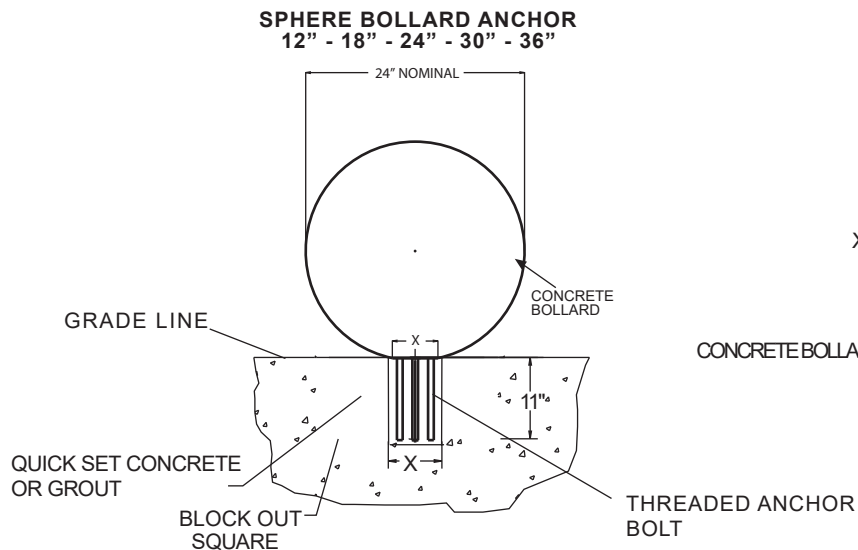


X = BLOCKOUT DIMENSION SHOULD BE 1/2" LESS THAN THE OUTSIDE OF THE SURFACE AREA TOUCHING THE GROUND.

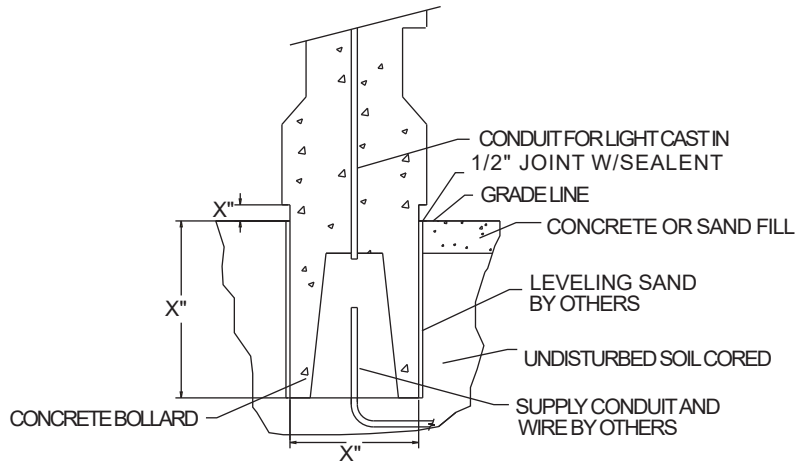

## ANCHOR STYLE A

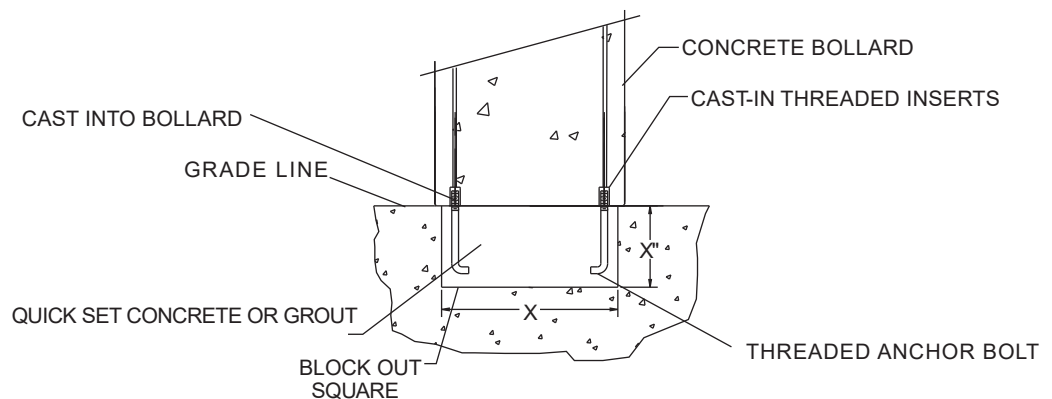

## ANCHOR STYLE B

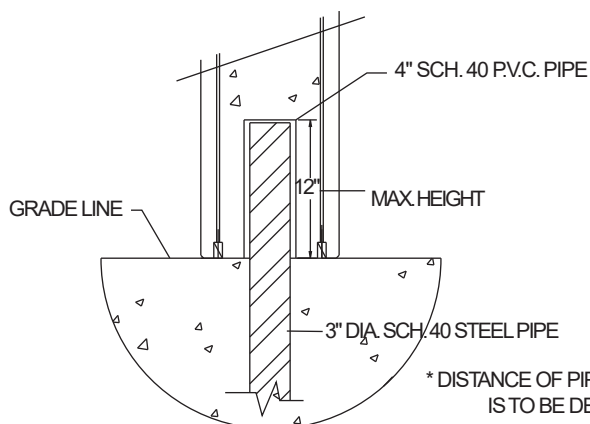

NOTE: THIS TYPE ANCHORING IS NOT USED AS BARRICADE. IF USING BOLLARD WITH LIGHT, RUN CONDUIT THROUGH CENTER OF BOLT PATTERN AND STUB OUT.

X = BLOCKOUT DIMENSION SHOULD BE 1/2" LESS THAN THE OUTSIDE OF THE BOLLARD.

**thepark** AND FACILITIES  
CATALOG

NOTE: THIS TYPE ANCHORING IS ALSO USED AS A BARRICADE. BOLLARD HELD IN PLACE BY STEEL PIPE. STEEL PIPE MUST BE ANCHORED IN CONCRETE FOOTING.

TYP. 12" DIA. CONCRETE BOLLARD SAME ANCHORING SYSTEM USED ON 14" AND 18" DIA. OR SQ. BOLLARDS