



136-1042 • Grill with two Optional Utility Side Shelves

- · Two infinitely adjustable cooking grates
- Structurally reinforced grates are virtually indestructible
- Grates tip back for fire building and cleaning
- Firebox is ring-reinforced on the bottom to combat heat warpage along with dieformed back flanges and side panel flares
- Theft-proof base attachment
- · Full 360° rotation for draft control
- Public use-type spring grips of coiled steel bar
- · Utility shelf option
- · Quality construction throughout


AVAILABLE OPTIONS

One or Two Side Utility Shelves Portable Disk Base Bolt-down Base Plate Base Portable Caster Base

SPECIFICATIONS:

- Model 136-1042 has a cooking area of 1040 sq. in. with two grates and a 32" x 32-1/2" firebox with nom. 8" high sides.
- Entire firebox is fabricated from 3/16" steel plate. All exposed corners are rounded to 1-1/2" radius and all edge connections are entirely welded. Firebox is ring reinforced and allowance for drainage is provided. The firebox has reinforcing flanges die-formed into back panels and reinforcing flares die-formed into side panels.
- The grates are infinitely adjustable from 3-3/4" to 12" above the bottom of the firebox and tip back to provide unobstructed access to the firebox for cleaning and fire building.
- Grates are structurally reinforced so that they will support the weight of two or more persons without sagging or bending.
- Grates are secured to firebox by 2 vertical 3/4" dia. A-36 steel bars that allow adjustment and prevent removal of grates from the orill.
- Grates are constructed from 5/8" dia. A-36 steel bars around the perimeter, 3/4" dia. A-36 steel bars for handles and 1/2" dia. A-36 steel bars to provide the grate surface.
- \bullet Grates are provided with two substantial spring grip handles suitable for use by the public made from 1/8" x 1/2" steel flat har
- A base attachment mechanism constructed from 3/16" steel plate is provided that is absolutely theft-proof, allows unrestrained continuous rotation in either direction and maintains a stable cooking surface.
- Standard: Grill is supported by a 3-1/2" O.D., 40" long, steel pipe for permanent installation in concrete footing
- Entire unit is finished in high temperature, heat resistant, nontoxic black enamel.
- Optional: The grill is provided with a 3/16" x 9" x 19-1/4" steel plate utility shelf.
- Optional: Grill is provided with a bolt-down base plate base for hard surface mounting applications.
- Optional: Grill shall be provided with a portable disc base.
- Optional: Grill shall be provided with a portable caster base.



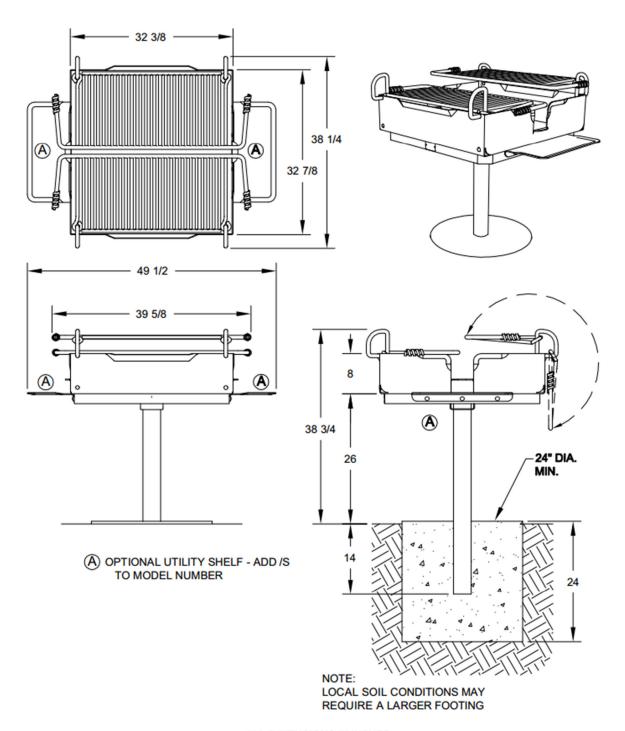

ALL DIMENSIONS IN INCHES