



The Park and Facilities Catalog, 3350 NW Boca Raton Blvd.,
Suite B2, Boca Raton, FL, 33431
1-800-695-3503

DRINKING FOUNTAIN SPECIFICATIONS

MODEL: 513

TYPE: Standard pedestal

PEDESTAL: 10-3/4" diameter steel pipe with 3/16" wall.

RECEPTOR: 18 gauge stainless steel with chrome plated brass drain plug.

BUBBLER: Chrome plated brass, locked to receptor with vandal resistant steel guard.

VALVE: Chrome plated brass push button assembly recessed in 1/2" steel plate with adjustable flow regulating valve.

MOUNTING: Surface. 1/2" thick 15-1/4" o.d. base support plate with four (4) bolt holes.

WASTE: 1-1/4" schedule 40 PVC.

SUPPLY: 1/2" reinforced vinyl tubing with 1/2" IPS hook-up and stainless steel fittings.




FINISH: Polyester powder coat.

COLOR: Green. Optional colors: red, blue, dark bronze, black, silver, sand, yellow.

OPTIONS:

- 31 1/2" self closing hose bibb
- 32 1/2" compression type with standard hose connection and vacuum breaker
- 32-VP same as above with key operated shroud
- 34 frost-proof jug filler
- 36 push button jug filler
- 37 foot wash
- 76 matching chilling unit
- 85 valve box
- 86 attached metal valve box
- 90 attached pet fountain
- 95 sand trap
- FP frost proof valve system
- SS stainless steel

MODEL 513
Pet Fountain -90 Is K-9 Option
Mounting: Surface

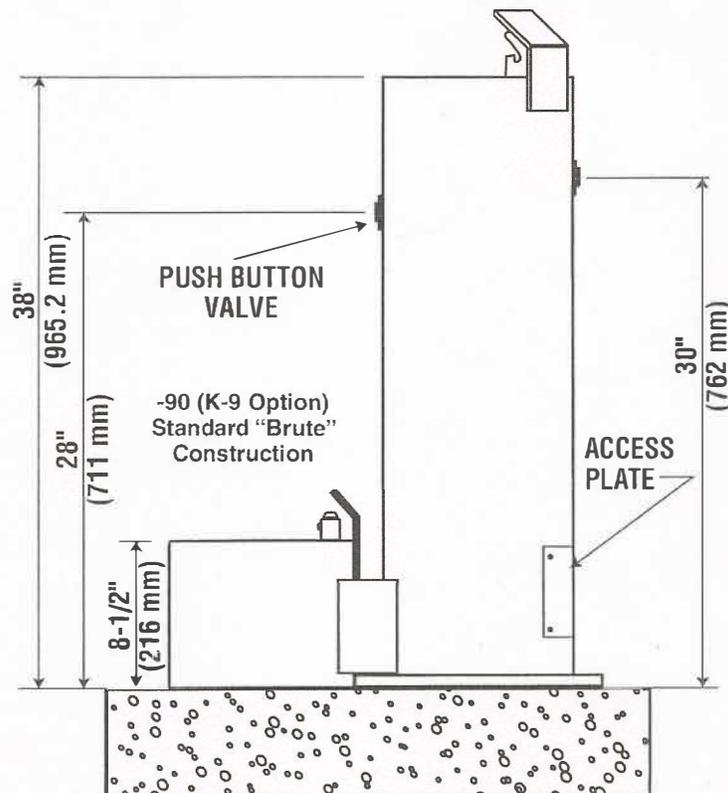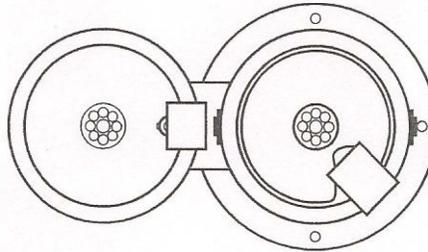

NOTE: FOUR 9/16" O.D.
MOUNTING HOLES
SPACED ON 13" DIA.

NOTE: THESE ROUGH-IN DIMENSIONS
MAY VARY 1/2" (13 mm) PLUS OR MINUS

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).