

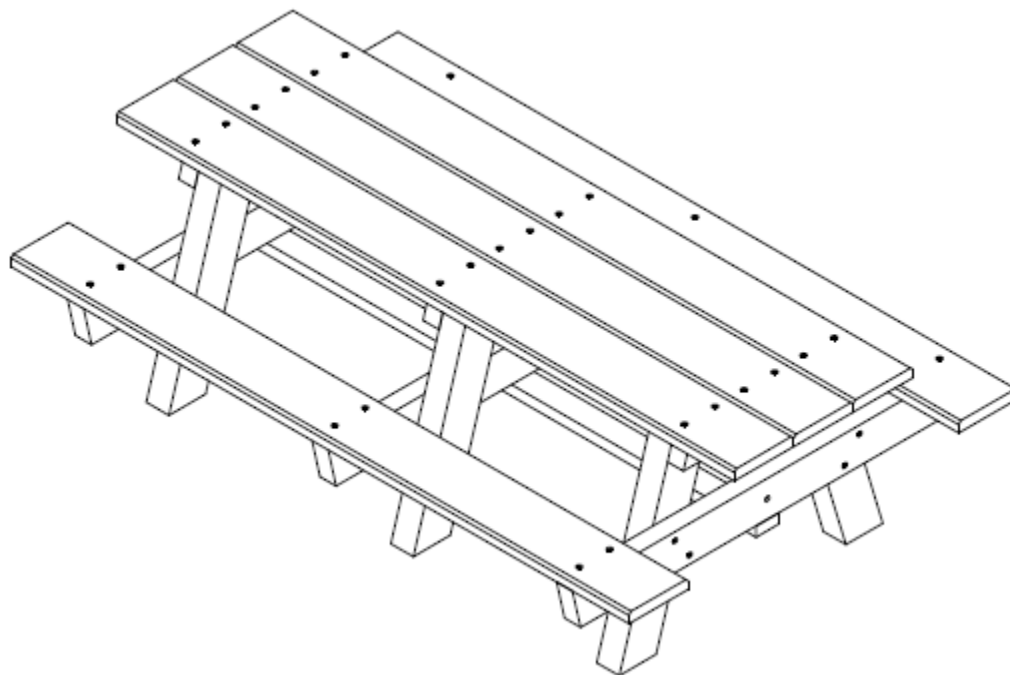
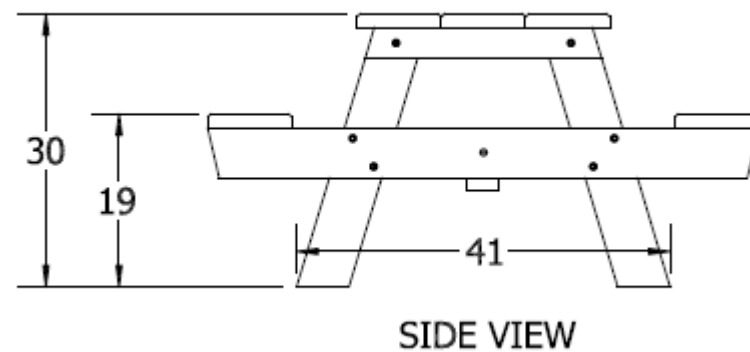


**A-Frame Recycled Plastic Picnic Table - 8 Ft.  
289-4007**

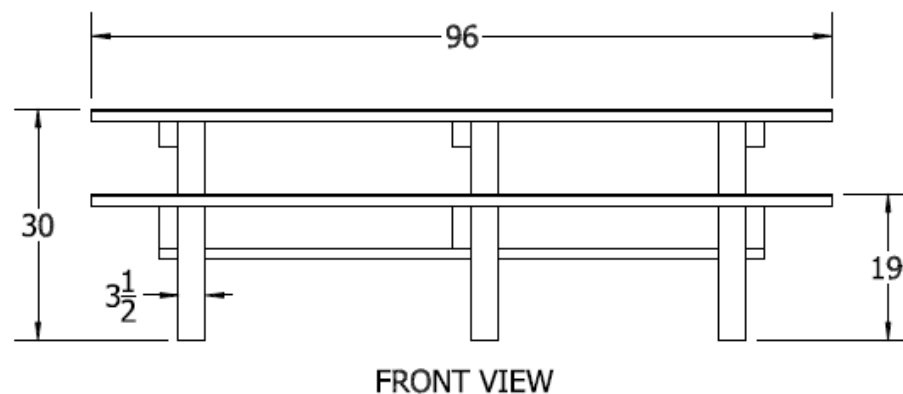


**Dimensions**

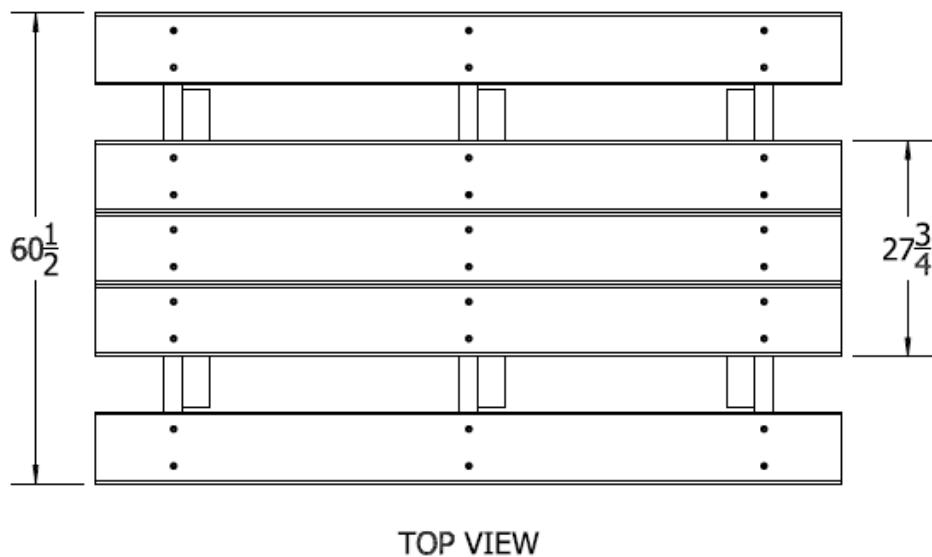


**Components**


Tools for Assembly: Powered driver  
7/16 Socket

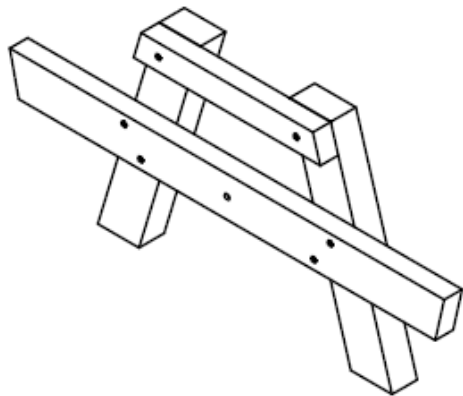

(3) A-Frame Bases

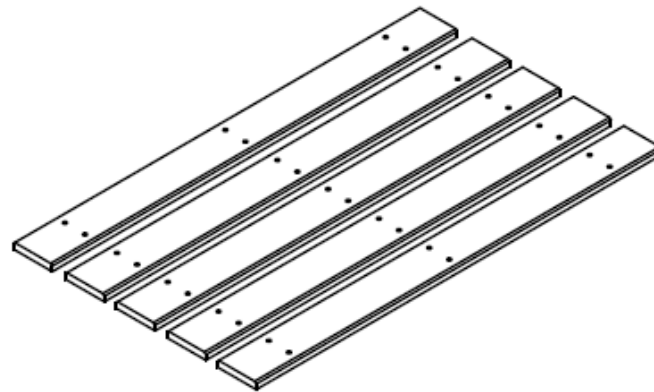


(5) Table Top & Seat Slats



**Hardware**


(33) 3 1/2" Hex Lag Screws  
(33) Flat Washers

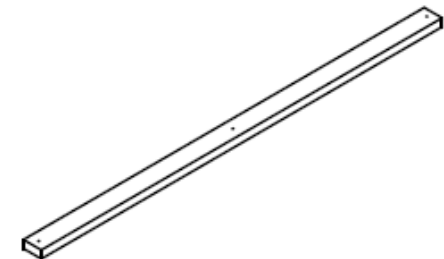

(1) 2 x 4 Foot Board

**Assembly Instructions**

Before you begin: Check components to verify all are included. Assembly requires two people and must be performed on a flat and even surface. Do not overtighten hardware as damage can occur.

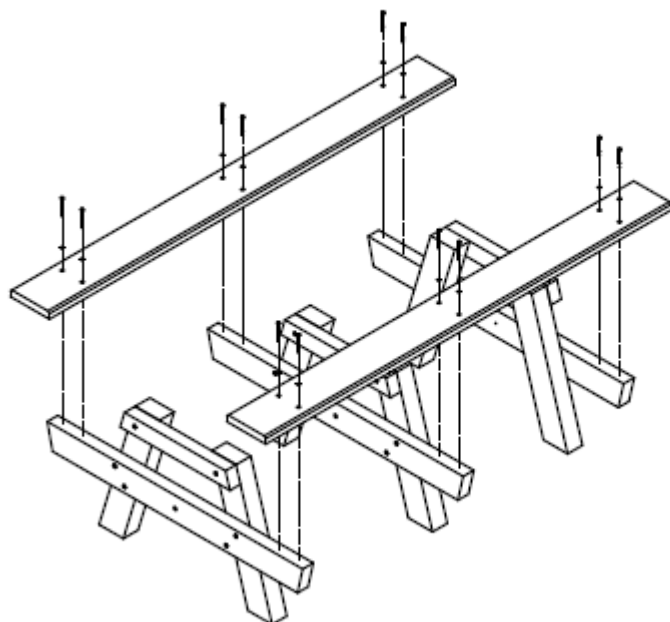


**Illustration 'A'**

**Step 1**

Stand A-frame bases upright and parallel to each other, the horizontal supports of the two end bases should face away from the center of the table. Place a slat on the top edge of the horizontal 3 x 6 of the A-Frame base supporting the seat. The pre-drilled holes should align more or less with the center line of the 3 x 6 support. Ensure the bases are square and plumb. Use the pre-drilled holes in the seat slat as a guide, drill starter holes in the 3 x 6 and attach using the 3 1/2" hex lag screws and flat washers. See Illustration 'A'. Repeat on the other side.

**Assembly Instructions Cont.**

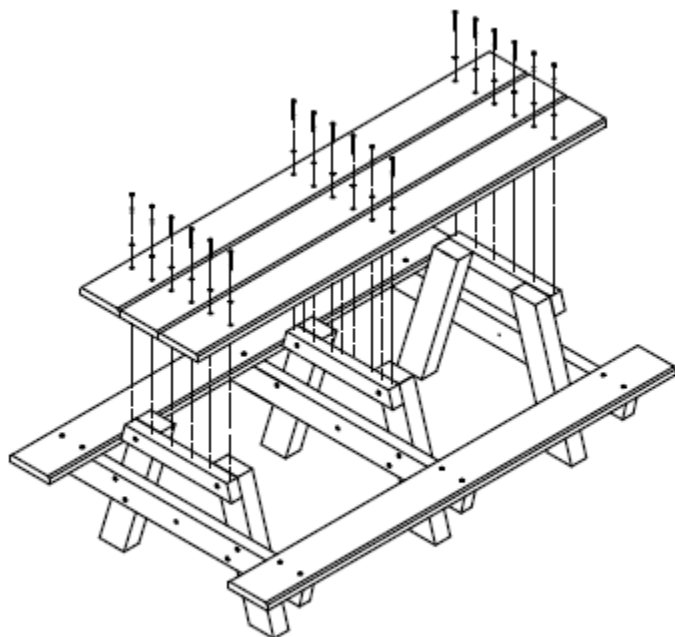


**Illustration 'B'**

**Step 2**

Place the table top slats spaced evenly on the A-Frames top supports, the pre-drilled holes should align more or less on the center line of each 3 x 4 cross support. Attach using the 3 1/2" hex lag screws and flat washers. See Illustration 'B'.

**Assembly Instructions Cont.**

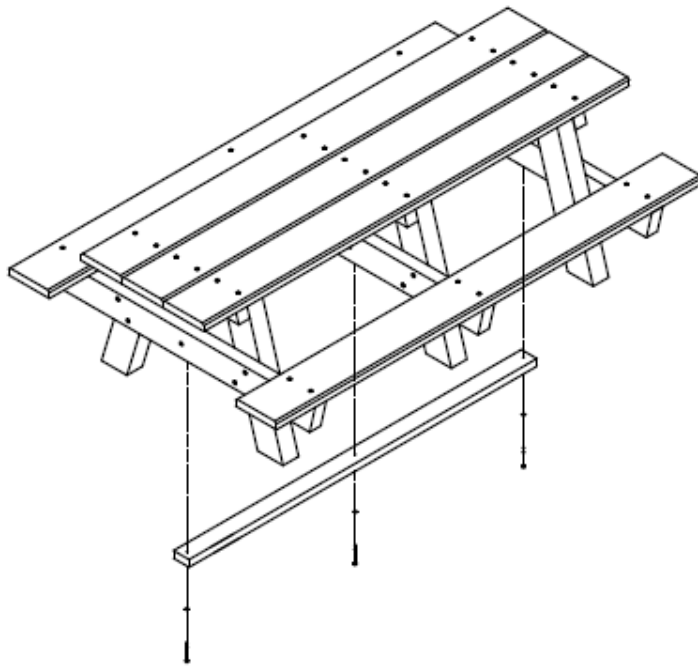

**Illustration 'C'**

**Step 3**

Make sure the table is square and tighten all screws. Attach the 2 x 4 foot board to the bottom of the A-frames using 3 1/2" hex lag screws and flat washers. See Illustration 'C'.

**Cleaning Tips**

The Park Catalog products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Park Catalog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.