




**Heritage Recycled Plastic Bench With Back - 5 Ft.
289-4011**

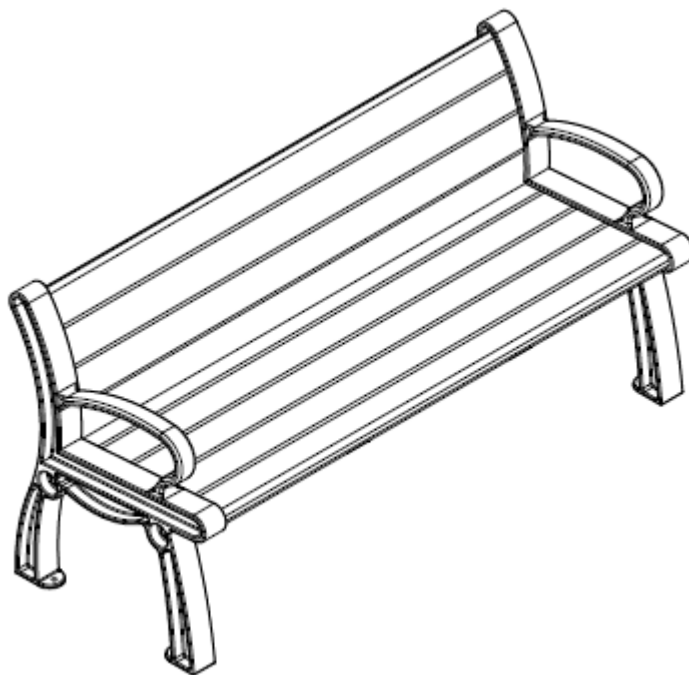


Dimensions

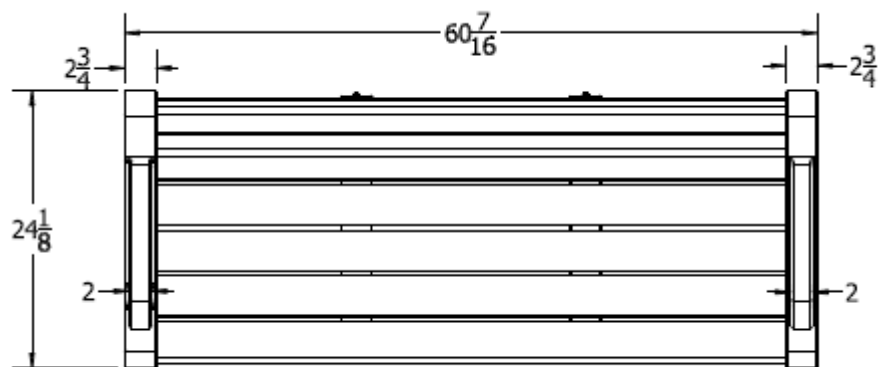

TOP VIEW

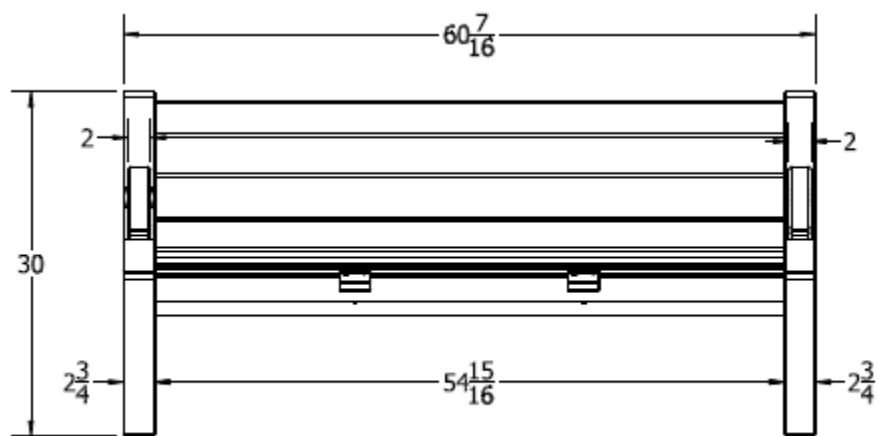

FRONT VIEW

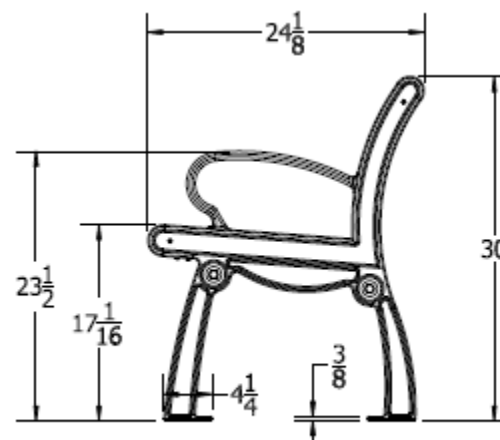


SIDE VIEW

Components


Tools for Assembly: Powered driver and Phillips Head Bit
Ratchet and 11/16" Socket



(2) Bench Ends

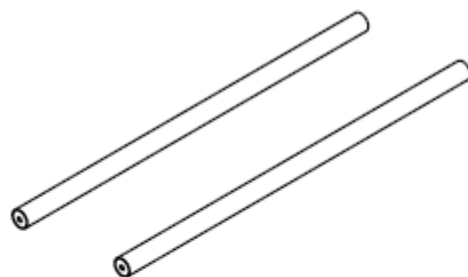

(2) Support Rods




(2) Back & Seat Brace



(4) Hex Head Bolts
(4) 1 1/2" Long Screws
(36) 1 1/4" Long Screws
(4) Concrete Anchors



(2) Bullnose Slats



(7) Seat & Back Slats

Assembly Instructions

Before you begin: Check components to verify all are included. Assembly will require two people and must be performed on a level and smooth surface. Do not overtighten hardware as damage can occur.

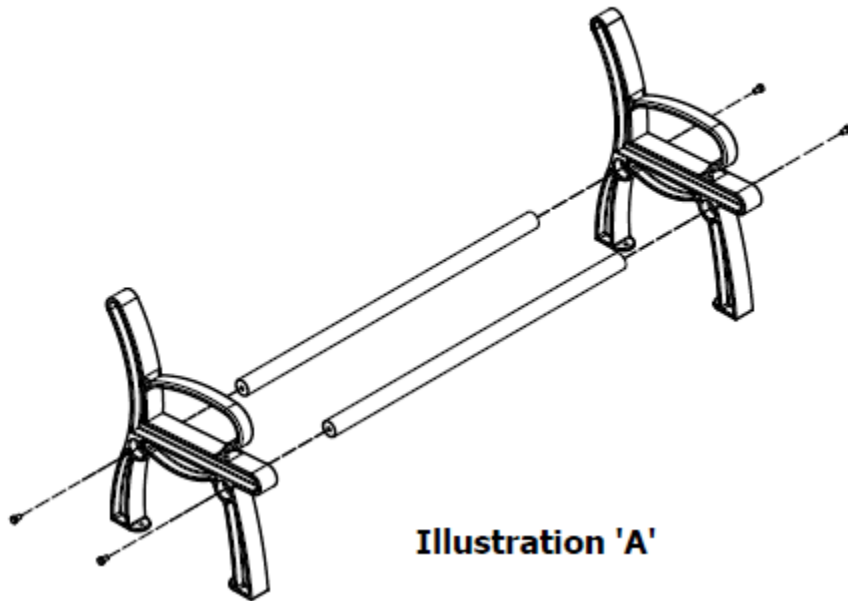


Illustration 'A'

Step 1

Loosely attach support rods to side frames using hex head bolts. See Illustration 'A'.

Assembly Instructions Cont.

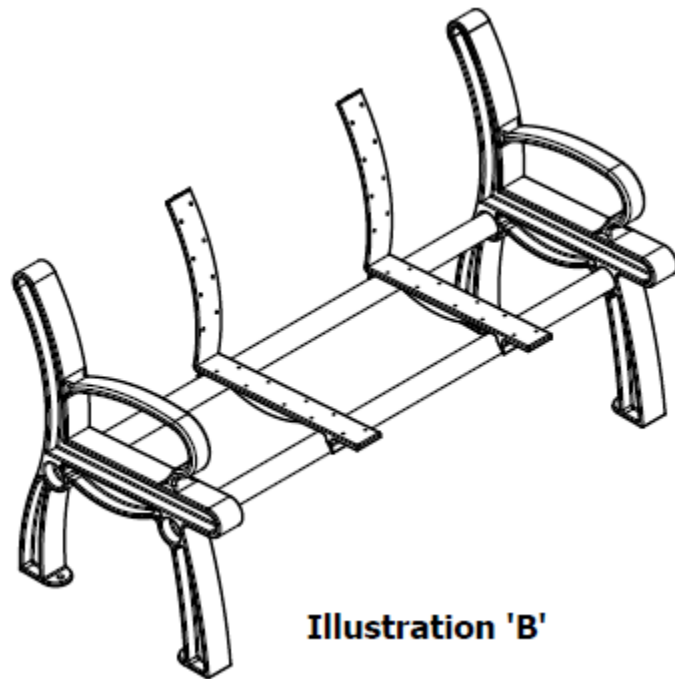


Illustration 'B'

Step 2

Place the seat & back braces equally spaced on the cross support rods, See illustration 'B'. Note - It is necessary for a second person to assist with this step as braces will not stand up on their own.

Assembly Instructions Cont.

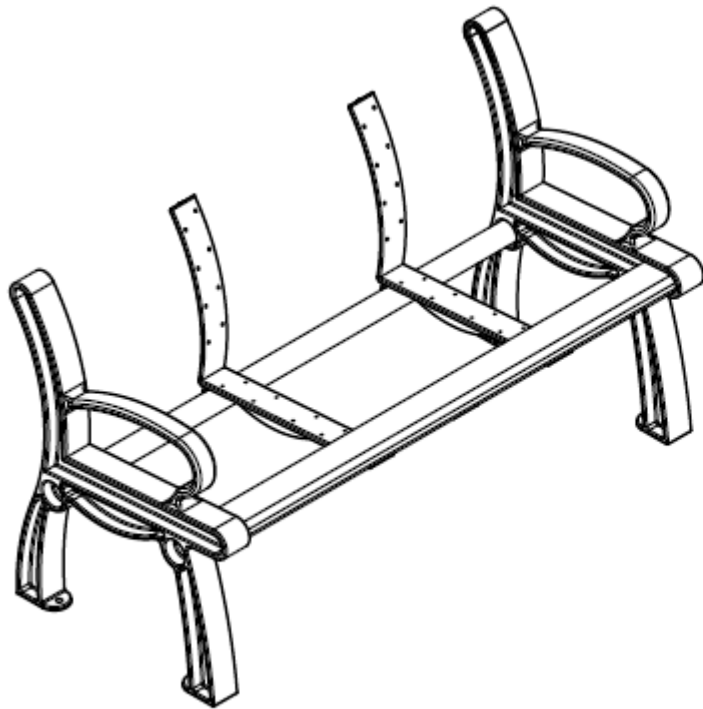


Illustration 'C'

Step 3

Position the front bullnose seat slat with the rounded edge facing out in the slots of each bench end. See Illustration 'C'.

Assembly Instructions Cont.


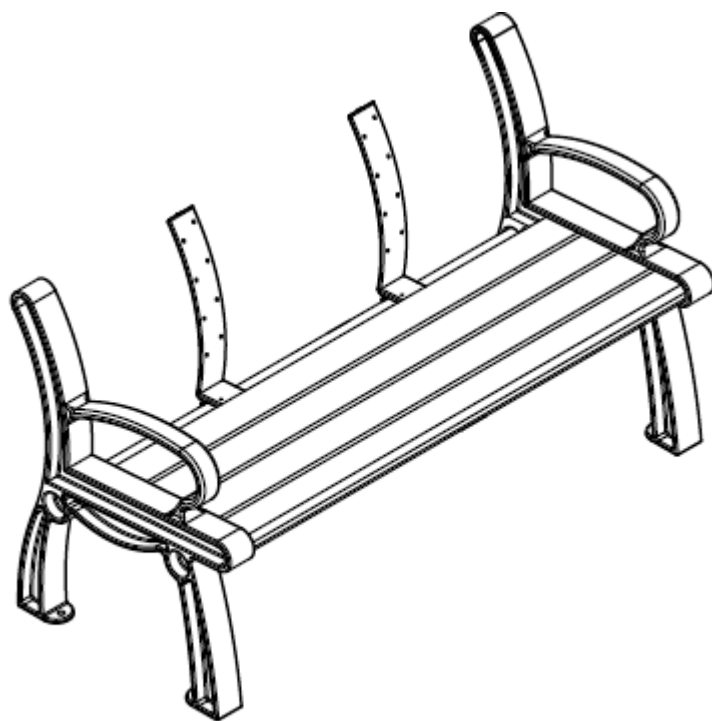


Illustration 'D'

Continue inserting the seat slats in the bench ends.
See Illustration 'D'.

Assembly Instructions Cont.

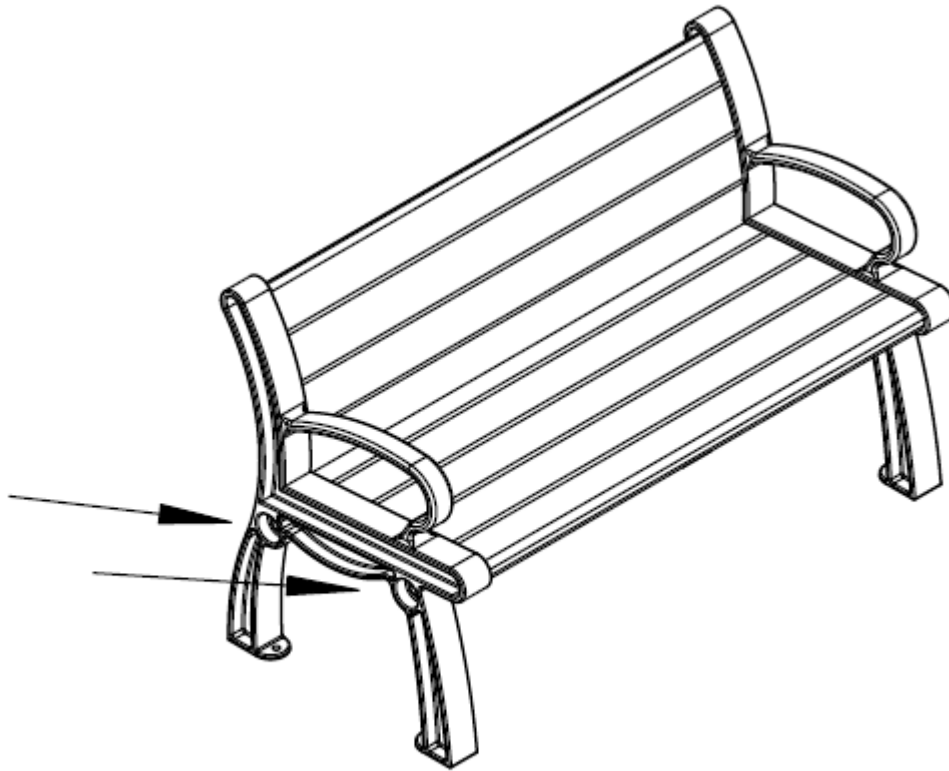

Insert the back slats, the final top slat will be a bullnose with the rounded edge facing up. With all slats in place, tighten the hex head bolts in each bench end previously installed. See Illustration 'E'.

Illustration 'E'

Assembly Instructions Cont.

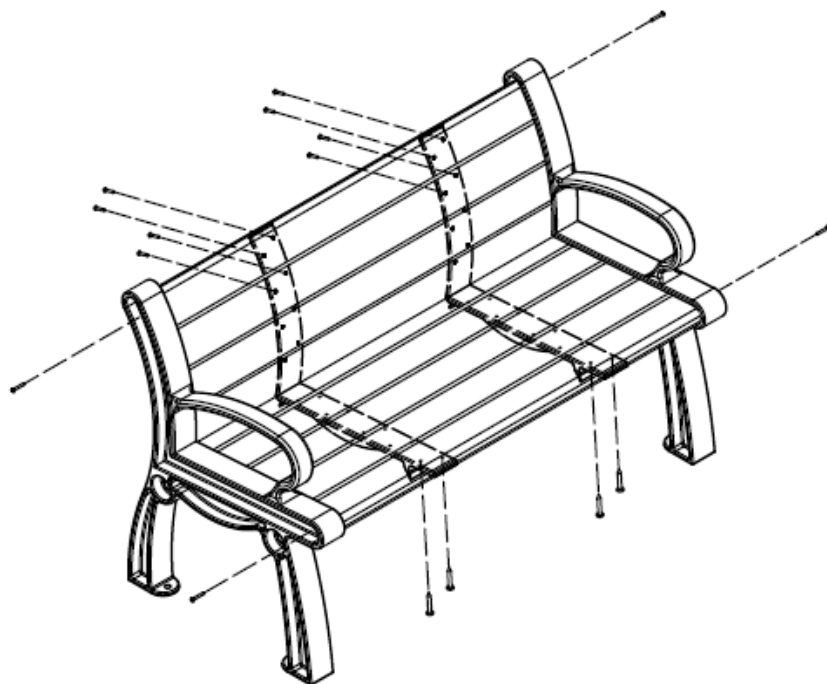


Illustration 'F'

Step 4

Attach the back & seat braces to the backside of the slats using 1 1/4" screws at the pre-drilled holes or slots of the braces. Secure the bench ends to the upper and lower bullnose slats with the 1 1/2" screws through the pre-drilled holes of the side frames. See Illustration 'F'.

The assembled bench can be securely fastened to a solid surface using the included wedge anchors for concrete or other appropriate hardware.

Cleaning Tips

The Park Catalog products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Park Catalog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.