

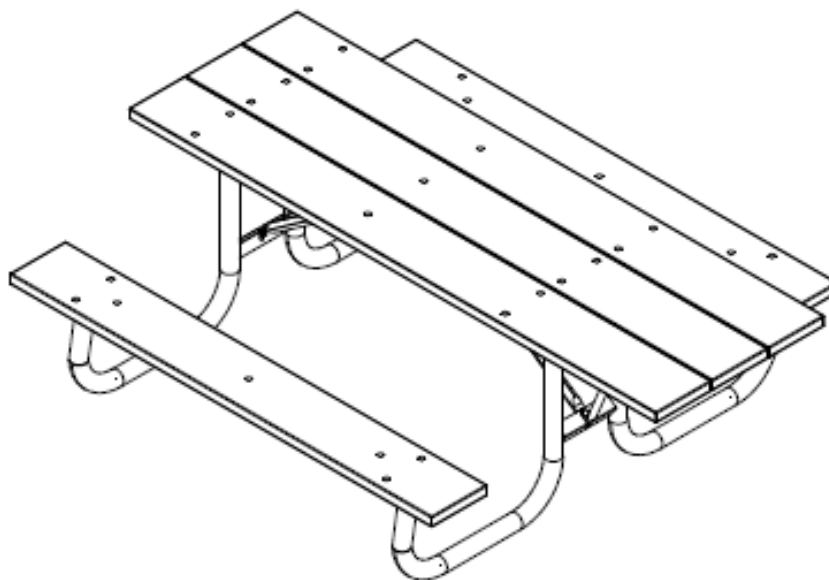
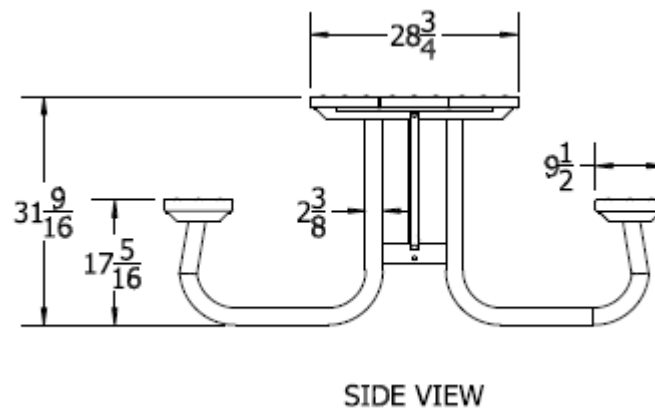


**Recycled Plastic Picnic Table - Galvanized Frame - 6 Ft. - ADA
289-4008**


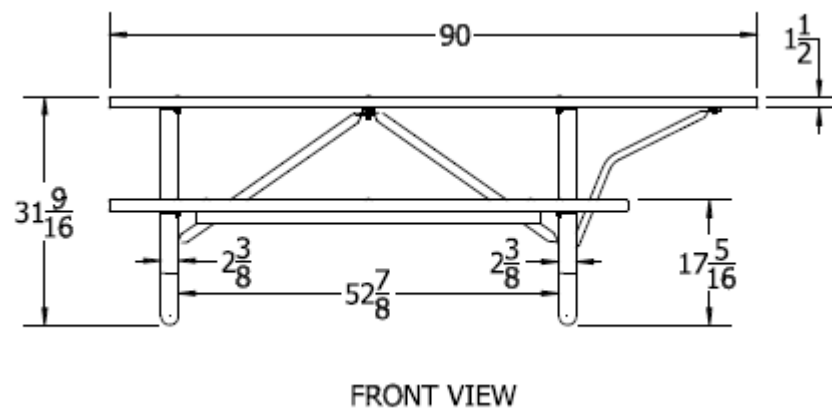


Dimensions

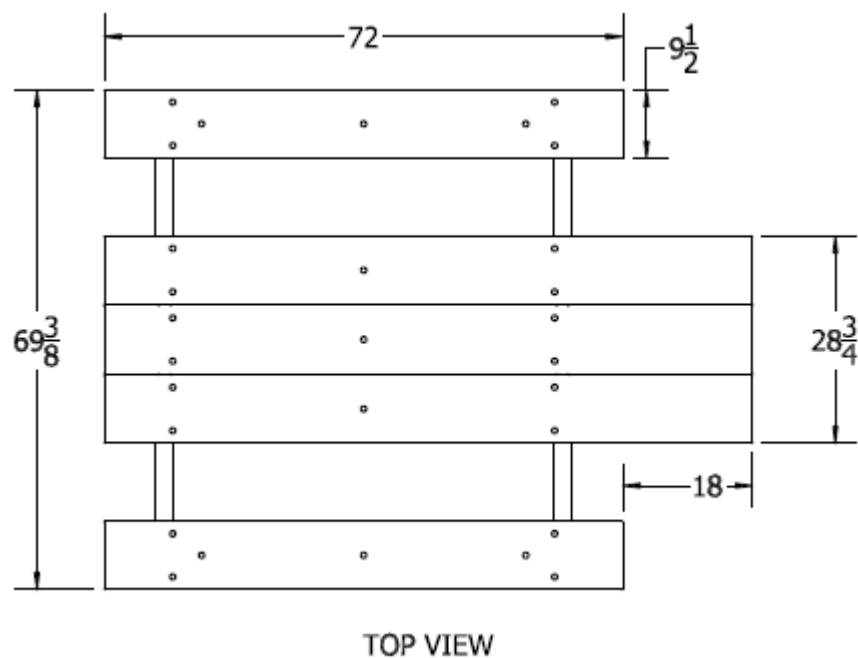


Components


Tools for Assembly: Ratchet and 9/16 Socket
9/16 Boxed or Open End Wrench

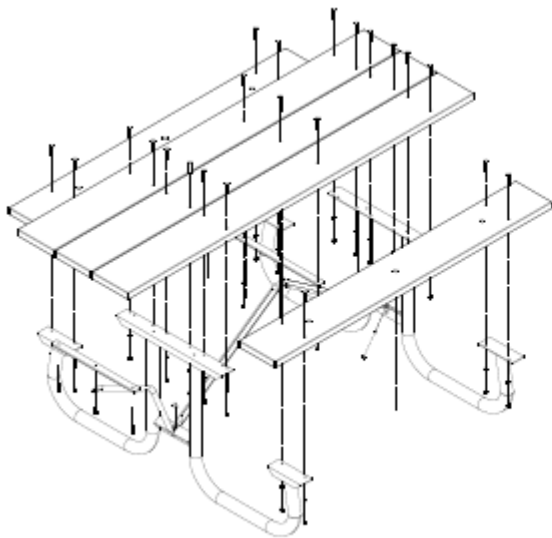

(2) Table Supports



(2) Seat Slats

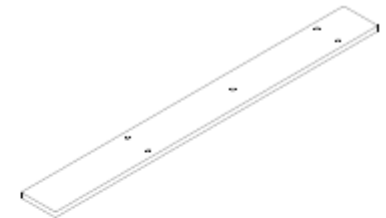

(3) Table Top Slats




(2) Table Struts



(2) Arm Struts



(1) ADA Support Arm



Hardware Pack

Assembly Instructions

Before you begin: Check components to verify all are included. Assembly requires two people and must be performed on a flat and even surface. Do not over tighten hardware as damage can occur.

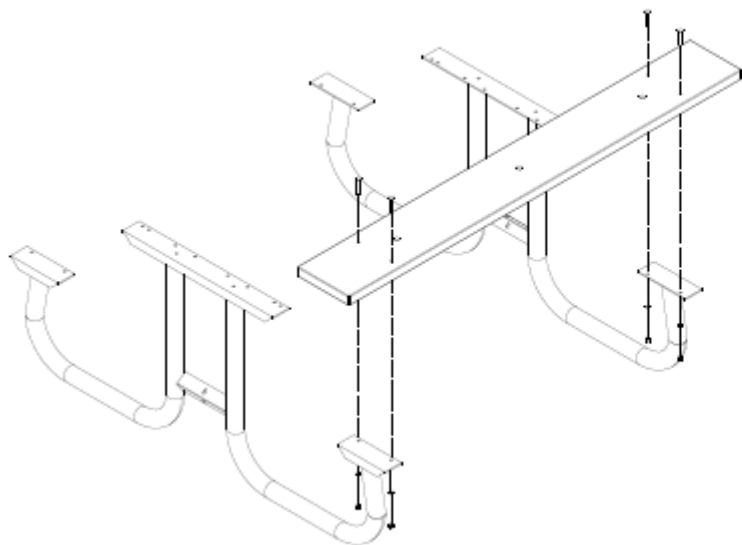


Illustration 'A'

Step 1

Position the table supports upright and parallel to each other on a flat surface. Lay a seat slat across the mounting surface of each support with the angle brace (mounted under seat) facing down. Align the pre-drilled holes in the seat with the mounting holes in each support. Attach using 2 1/4" long carriage bolts, lock washers and hex nuts. See Illustration 'A'. Repeat for the other side.

Assembly Instructions Cont.


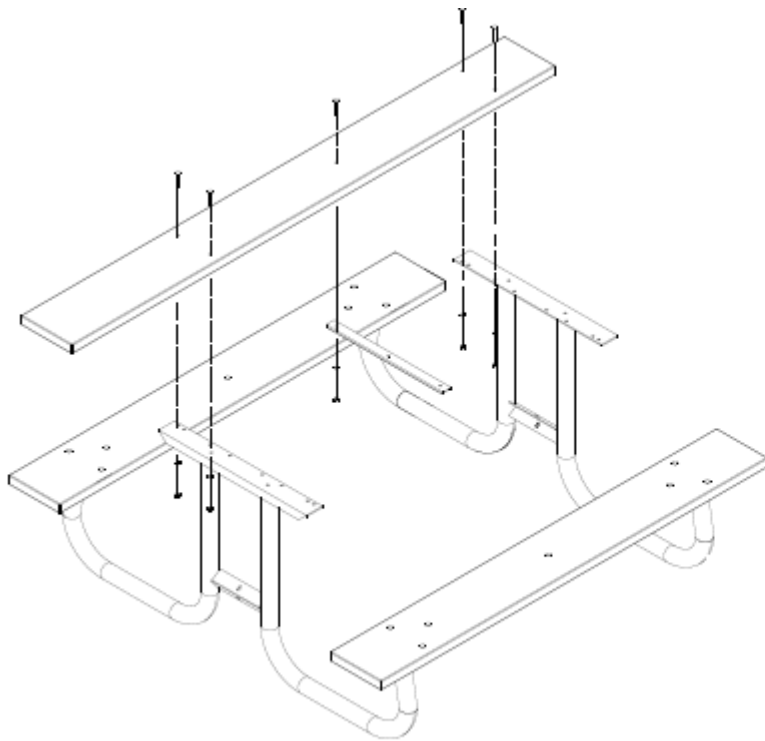


Illustration 'B'

Step 2

Attach one outside edge table top slat to the supports using 2 1/4" long carriage bolts, lock washers and hex nuts. Place middle table strut with flat side facing up and perpendicular to the underneath side of previously installed table top board, attach using 2 1/4" long carriage bolt, lock washer and hex nut as shown in Illustration 'B'

Assembly Instructions Cont.

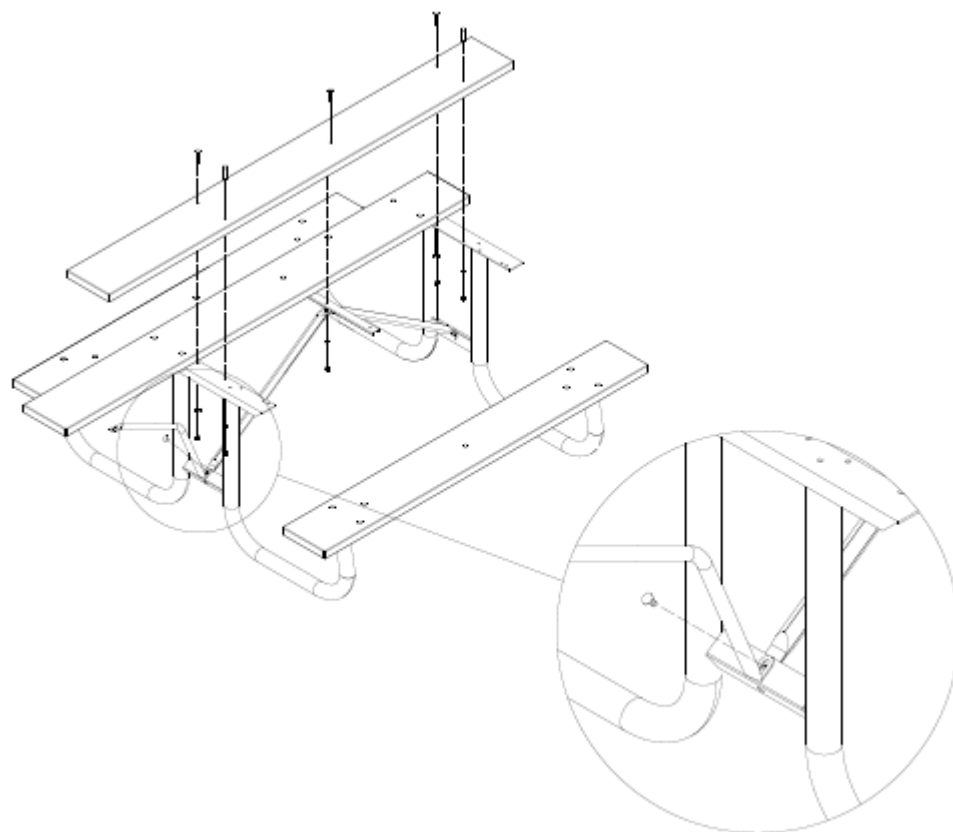

Connection Detail

Step 3

Attach center table top slat to supports using 2 1/4" long carriage bolts, lock washers and hex nuts. Position both arm struts on the middle table strut, attach to strut and middle slat using a 3" long carriage bolt, flat washer, lock washer and hex nut, leave loosely tightened. See Illustration 'C'. Attach the support arm of the short side of the table to the lower table support bracket using 1" hex bolt, flat washer, lock washer and hex nut.

Position the ADA support arm and remaining arm strut on the lower table bracket, attach using 3" carriage bolt, 3/8 flat washer, 3/8 lock washer and 3/8 hex nut, see connection detail in Illustration 'C'. Leave hardware finger tight.

Assembly Instructions Cont.

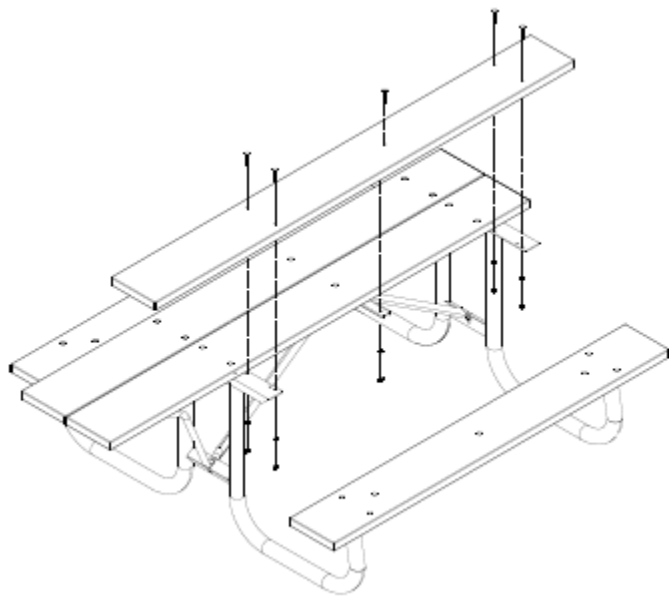


Illustration 'D'

Step 4

Attach the remaining table top slat to the supports and middle strut using 2 1/4" long carriage bolts, lock washers and hex nuts. See Illustration 'D'.

Assembly Instructions Cont.

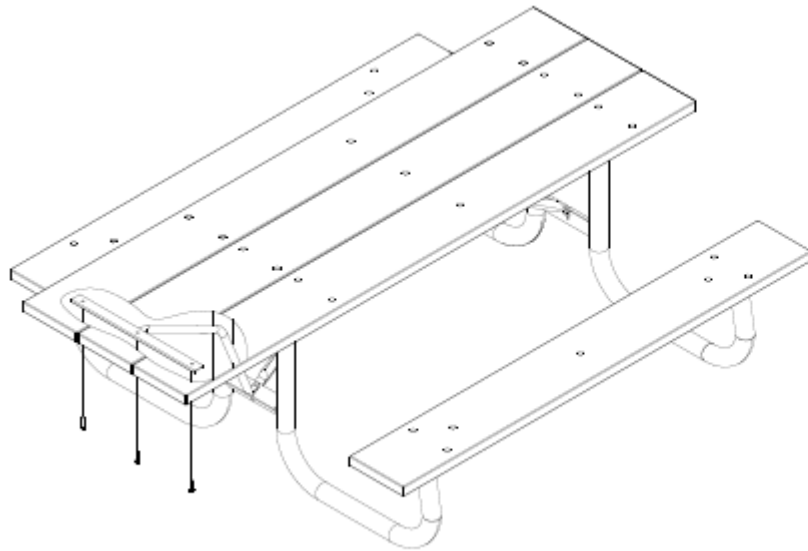


Illustration 'E'

Step 5

Place the table strut approximately 1" from the end of the table with flat side facing up and perpendicular to the underneath side of the top slats. Ensure the bolt hole of the ADA support arm aligns with the center hole of the table strut. Attach the support arm and table strut with a 1 1/2" lag screw through the aligned holes of both pieces. Use the same 1 1/2" lag screws to attach both sides of the strut to the table top slats. Tighten the ADA support arm connection at the lower table bracket. See Illustration 'E'.

Cleaning Tips

The Park Catalog products are durable and designed to last a lifetime, like most things that spend the majority of time outdoors, sometimes they need a little cleaning. In most cases, all a Park Catalog product requires is mild dish soap, a bucket of warm water and a clean cloth. Apply the soapy mixture to scrub away the dirt and then rinse with water. If you have some stubborn dirt down in the grooves and divots, mix 1 part bleach to 2 parts water, apply with your clean cloth, scrub with a soft bristle brush if needed and then rinse.