


Deluxe Public Work Stand 567-1002

Recommended Setbacks

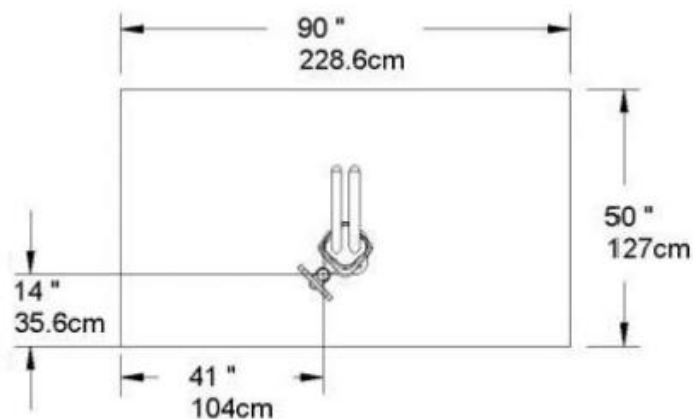

- Minimum of 41" from side of Deluxe Public Work Stand to wall or other objects
- Minimum of 14" from back of Deluxe Public Work Stand to wall
- Minimum of 60" from an adjoining street or cycle path

Tools Included



- Philips & standard screwdrivers
- Steel core tire levers (2)
- Headset/pedal wrench
- 8/10mm cone wrench
- 9/11mm cone wrench
- Torx T-25
- Hex key set

Dimensions

| Model # | Description | Type of Mount | Weight | Length | Width | Height | Space Requirement |
|---------|-------------|---------------|---------|--------|-------|--------|-------------------|
| 26347C | Powder Coat | Flange | 84 lbs. | 10" | 10" | 55" | See Back |