


Poly Dog Valet

Model: 135-1019

Specifications

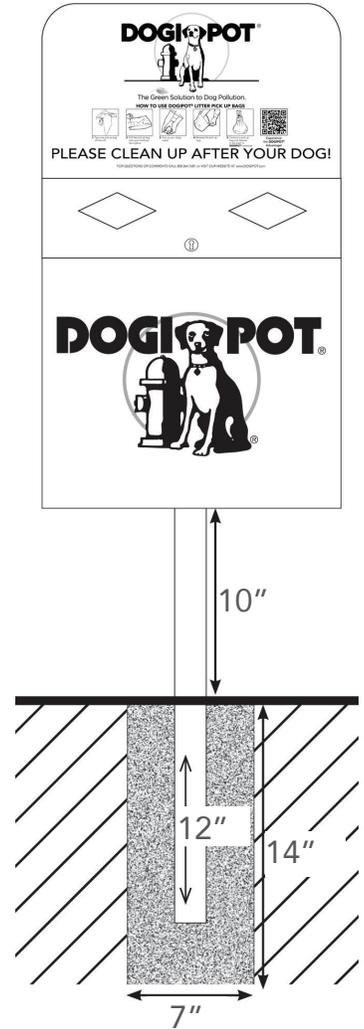

Product Details:

Dimensions:	31" h x 19" w x 14" d
Materials:	.192" Forest Green or Sand Beige polyethylene
Features:	<ul style="list-style-type: none">• Two diamond shaped bag dispenser slots• Front locking access lid• Clearly posted instructions
Keys:	2 for locking front access lid
Dog Waste Bags:	2 rolls, 200 bags per roll, installed.
Receptacle Liners:	1 box, 50 bags per box.
Total Ship Weight:	39 lbs (mounting hardware included)

Poly Dog Valet

Model: 135-1019

Specifications



Poly Dog Valet


Dimensions:	31" h x 19" w x 14" d
Materials:	.192 Forest Green and Sand Beige polyethylene
Bag Capacity:	400 bags
Features:	<ul style="list-style-type: none"> • Two diamond bag dispenser slots • Locking front access lid • Clearly posted instructions • 5" diameter round receptacle openings on each side
Trash liner Bags:	One box, 50 per box, included.
Weight:	30 lbs.

Galvanized Telescoping steel mounting post

Dimensions:	2' h x 2" w x 2" d
Materials:	11 gauge galvanized steel
Hardware:	2 carriage bolts 2 washers 2 locknuts
Weight:	9 lbs.

Total height from above ground	41"
Space between ground and dog valet	10"

Hole:	14" d x 7" w
	fill with 40lbs. "ready to use" concrete

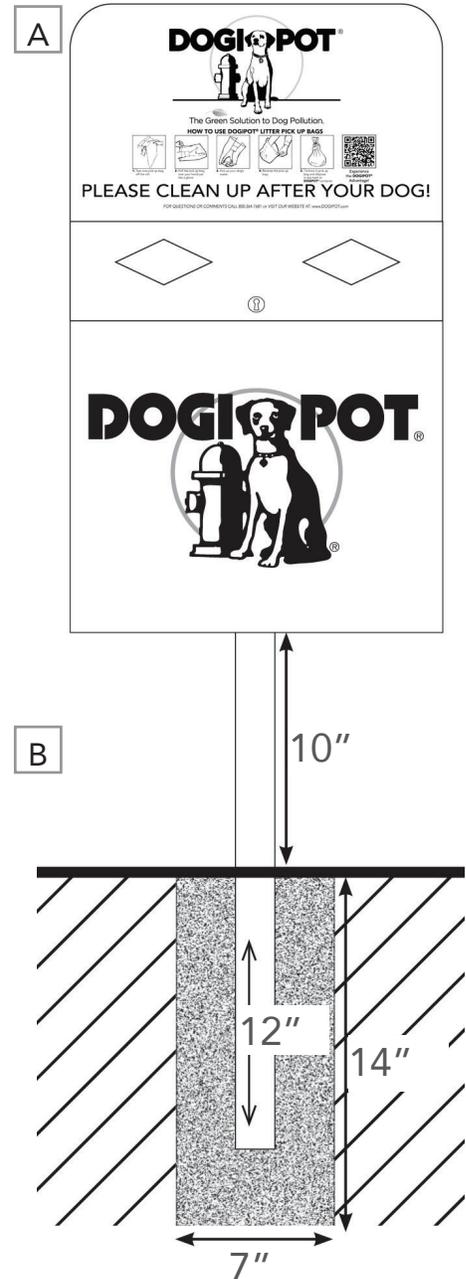

1. Select a good visible spot in your community or park where you want to install the **Poly Dog Valet**.
2. Insert the smaller portion of the post (1¾") into the larger portions (2") until the first 9 holes are lined up between the posts. Using the (2) carriage bolts, washers and locknuts, install them in the 4th and 6th holes and tighten. The head of the bolts should face front to back. Over all length should be 38 inches.
3. Dig a 7" diameter hole, approximately 14" deep into the soft ground. Insert the smaller (1¾") smaller of the telescoping galvanized steel post approximately 12" into the hole filled with a 40 lb. bag of "ready to use concrete mix". Level the post in strait vertical position and let concrete dry for at lease 12 hours.
4. Slide the **Poly Dog Valet's** back wall inset completely over the 2" x 2" mounting post (see illustration A). Use the (2) 3" bolts, washers and locknuts, fasten the mounting post to the container through the pre-drilled holes inside the **Poly Dog Valet** body. You may have to wiggle the **Poly Dog Valet** slightly up and down on the mounting post to get the bolts through the holes in the **Poly Dog Valet** and the mounting post.
5. Insert one of the enclosed **Trash liner bags** into the container body (fold over the upper edge of the container) (see Illustration B).
6. To replace the rolls of **the Dog Waste Bags**, pull out the empty box, remove the diamond shaped perforated tab from a new bag/roll box and push box in place on the lid shelf. **The lid dispenser opening should match the box opening and the lettering on the box should not be upside down**. Be sure the bags will be dispensed following the upper wall of the dispenser opening see Illustration C). Close the lid and pull the first bag out, by finding the raw edge of the first bag through the dispenser opening.
7. **ENJOY WATCHING PET OWNERS PICK UP AFTER THEIR DOGS!**



A



B



C