


Model: 135-1027

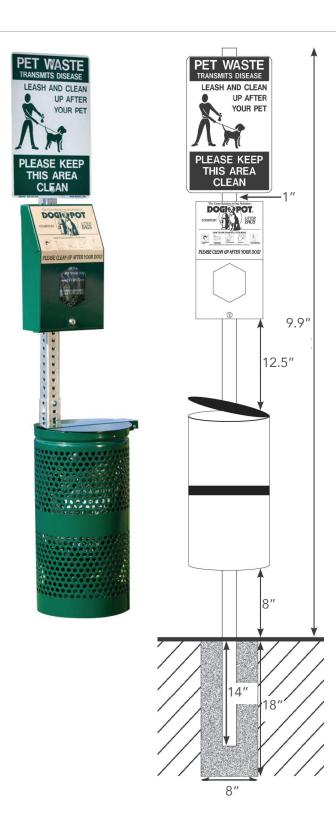

Product Details:		
Mounting Hardware:		
Aluminium Pet Waste Sign:	2 Tap bolts - 2-1/2 x 1/4 2 Washers 2 Locknuts	
Aluminium Bag dispenser:	2 Bolts - 2-1/2 x 1/4 2 Washers 2 Locknuts	
Trash Receptacle:	1 Bolt - 2-1/2" x 1/4" 1 Bolt - 2 3/4" x 1/4" 1 Washer 1 Locknut	
Keys:	2 for disperser locking front access panel.	
Bags:	4 packs, 100 per pack, installed	
Steel Trash Receptacle:	 10 Gallon With attachable lid and trash liner bag retainer bands. 	
Trash Can Liner Bags:	1 box, 50 per box, included	
Total Ship Weight:	45 lbs	

Aluminium Header Pak Pet Station w/ Sign

Specifications



Model: 135-1027

(A) Pet Waste Sign

Dimensions:	18"h x 11.5"w
Weight:	1.35 lbs.
Materials:	14 gauge reflective aluminumForest Green on White

(B) Bag Dispenser:

Dimensions:	15'5"h x 9.4"w x 3.25"d
Bag Capacity:	400 bags
Materials:	12 gauge powder coated forest green aluminum
Features:	One bag dispenser slotFront locking access panelClearly Posted instructions
Weight:	7 lbs

(C) Trash Receptacle:


Dimensions:	23"h x 11.5"dia.
Features:	10 gallon capacity with interior trash liner bag retainer bandsattached stainless steel hinged lid
Materials:	16 gauge powder coated forest green steel
Bags:	1 box, 50 count per box, included
Weight:	14.6 lbs

(D) Telescopic galvanized steel mounting post:

Dimensions:	2" × 2" × 8'
Materials:	11 gauge galvanized steel
Weight:	15 lbs

Total height from above ground:	6′ 6″
Space Between dispenser and sign:	1"
Space between receptacle and dispenser:	12.5"
Space between ground and receptacle:	8"



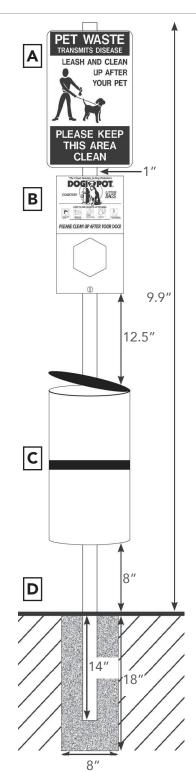

Installation Instructions



Model: 135-1027

- Select a good visible spot in your community or park where you want to install the Aluminium Header Pet Station.
- 2. Prior to installation, remove the 1¾" x 1¾" x 4' portion of the mounting post from the 2" x 2" x 4' portion of the mounting post before cementing. Insert the larger portion of the mounting post (2" x 2" x 4') approximately 14" into an 18" deep by 8" diameter hole filled with a 40 lb. bag of "ready to use" concrete mix. To stabilize the post while cementing, place a rod, bolt or other device through the two bottom holes, prior to inserting into the ground and cementing. Level the post in a straight vertical position and let concrete dry for at least 12 hours.
- 3. After the concrete is dry, insert the smaller portion of the post (1¾" x 1¾" x 4') into the larger cemented portion of the post (2' x 2' x 4') until the first 4 holes are lined up between the two posts. Use two (2) carriage bolts, washers and locknuts to fix the telescopic post in position, the upper bolt in the top overlapping hole, pointing from right to left and the lower bolt in the bottom overlapping hole, pointing from front to back. The total height above ground with both post parts should now be approximately 6"6".
- 4. Start by installing the **Aluminium Header Pet Sign** on top of the 1¾" post, with the upper hole matching the most upper hole in the square post using the enclosed 2¼" bolts, washers and locknuts. Continue installing the **Aluminium Header Bag Dispenser** according to the mounting instruction enclosed with the Dispenser,

- ensuring that he upper edge of the Dispenser is approximately 1" below the lower edge of the **Aluminium Header Pet Sign**.
- 5. Install the Steel **Header Receptacle** through the pre-drilled top oval holes in the back wall of the receptacle and through the square post with the remaining bolts, washers and locknuts, using the 234 bolt on top and the 2½ bolt below. The upper edge of the trash receptacle must be approximately 121/2" below the lower end of your Aluminium Header Pak Bag Dispenser so that the lid may completely open. The upper back wall of the trash receptacle is supposed to touch the head of the lower post carriage bolt, which creates some space between the post and the receptacle, allowing the receptacle lid to open from left to right, without touching the post.
- 6. Insert one of the enclosed **Trash Liner Bags** into the trash receptacle, folding it over the interior retainer bands. As with any powder coated steel product constantly exposed to the elements, proper installation and general maintenance will help prevent and minimize corrosion and expand the life of the steel trash receptacle (can be upgraded to aluminium (item #1206A-L) for an additional charge). **Aluminium Header Pak Pet Station** offers Product Maintenance Paint to help cover any paint chips which may occur in the powder coating during the life of the product.
- 7. ENJOY WATCHING PET OWNERS PICK UP AFTER THEIR DOGS!